


Our internally fed screens are ideal for the removal of industrial wastewater solids and contaminants down to 0.25 mm openings. The screens remove the inorganics as well as the organics from the waste streams. With the addition of the Floccin products, the screen can perform equally to conventional clarifiers and/or DAFs for removal of wastewater contaminants.

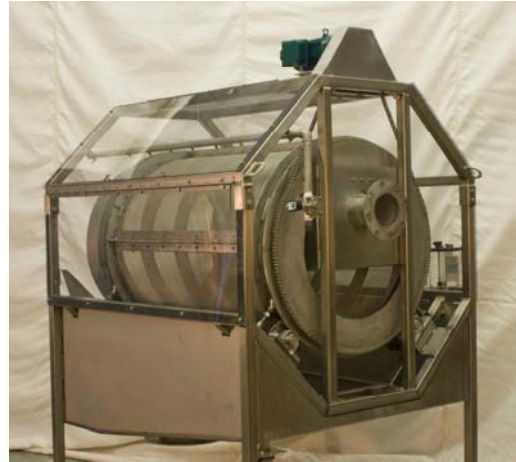

For 0.25 mm (70 mesh) screen opening

Size	3x4x70	3x8x70	4x8x70	4x12x70	6x12x70	6x16x70
US gpm	100	200	300	500	700	1,000

For 0.5 mm (35 mesh) screen opening

Size	3x4x35	3x8x35	4x8x35	4x12x35	6x12x35	6x16x35
US gpm	200	400	600	800	1,200	1,800

For 1.0 mm (18 mesh) screen opening

Size	3x4x18	3x8x18	4x8x18	4x12x18	6x12x18	6x16x18
US gpm	400	800	1,200	2,000	3,000	4,000

For 2.0 mm (10 mesh) screen opening

Size	3x4x10	3x8x10	4x8x10	4x12x10	6x12x10	6x16x10
US gpm	800	1,600	2,000	3,000	4,000	6,000

Screen Features:

- All 304 or optional 316L stainless construction
- Individually Removable Screens
- Sealed and shielded L-100,000 hour bearings with Auto lube system
- Chain drive with variable speed control
- External Spray bar with adjustable ON/Off/Duration Timer
- TEFC Motor
- Chain lube system
- Gasketed and hinged access hatches